




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>G06F 3/023, H04M 11/06</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/41061</b> <b>(43) International Publication Date:</b> 13 July 2000 (13.07.00)
<b>(21) International Application Number:</b> PCT/US99/30129 <b>(22) International Filing Date:</b> 17 December 1999 (17.12.99) <b>(30) Priority Data:</b> 09/224,435 31 December 1998 (31.12.98) US <b>(71)(72) Applicant and Inventor:</b> CHANG, Liang, Hsi [US/US]; 19837 Sunset Vista Road, Walnut, CA 91789 (US). <b>(74) Agents:</b> STOUT, Donald, E. et al.; Stout, Uxa, Buyan & Mullins, LLP, 4 Venture #300, Irvine, CA 92618 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

(54) Title: REDUCED KEYBOARD WITH DIRECTIONAL SELECTION KEYS

## (57) Abstract

A data entry and processing system providing for simple two stroke entry of numerous auxiliary alpha-numeric data (40) in addition to the single stroke entry of numeric data, using conventional data entry keys. The key array includes a set of radial direction indicator keys (26-33) that are used with the conventional keys (35) to select and enter a given alpha-numeric data item. An LCD display, a pre-programmed micro-processor and other electronic components are included to display the data entries, as well as to convert entered data signals to the necessary DTMF tones for telecommunication or ASCII codes for computer data entries. The system is simple for use by ordinary users, and all electronic components are standard, minuscule in size, small in number, low in power need and low in cost. It is particularly adaptable for miniaturized device application.

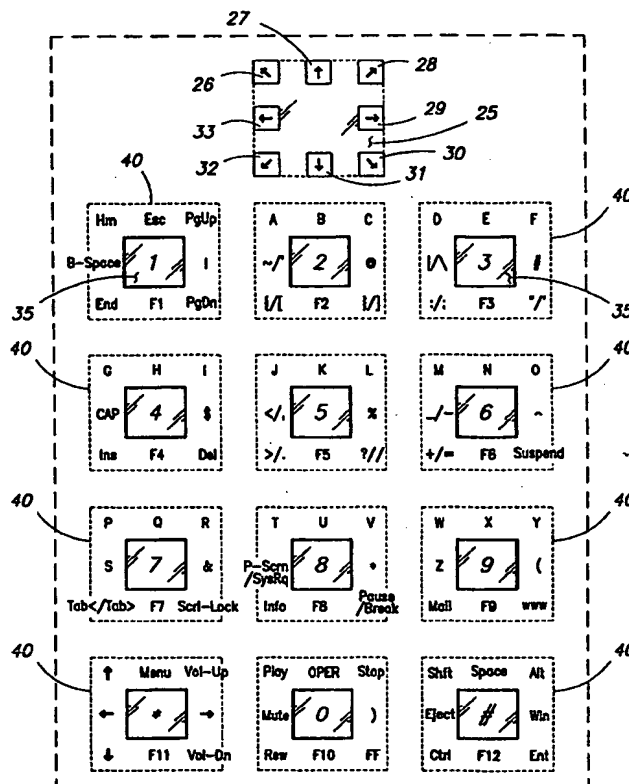

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## REDUCED KEYBOARD WITH DIRECTIONAL SELECTION KEYS

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

This invention relates to keypad and keyboard systems for data entry or device control and more particularly, to a directionally-mapped, keyed alpha-numeric data input/output system.

5

#### 2. Background

On the present day conventional telephone keypad, there are ten numbered keys, an asterisk key and a pound sign key. The letters of the alphabet are listed in groups of three on eight of the number keys. Entering numerals is performed by simply depressing the indicated keys in turn. However, for entering any given letter (alpha) a special series of key strokes is required, and this method is not generally accepted or understood by the public. In telecommunication applications such as voice mail directory search or in a stock purchase using an electronic broker, a unique interpretation of alpha data codes is often necessary. As a result, errors in alpha data entry, using the conventional keypad, are a common and frustrating occurrence. The above prompts frequent requests for a simple, relatively error free method of alpha data and numeric data entry.

10

15

20

There have been many devices invented and available which purport to solve the problem posed by alpha-numeric data entry in a conventional key array, but none have been accepted by the public or manufacturers to date. This has been expressed as being primarily because of their difficulty in use and/or manufacturing.

25

Keyboards for computers and control panels typically have many keys, with some keys having two possible functions. The resulting keyboard size is acceptable for desktop computers, but not for space constrained computers such as laptops or various small, portable control panels. The current solution has been to make the keys very small in size and to require depressing several keys in correct sequence for a given command entry. For a user having large fingers, a small key surface and small separation between keys is unsatisfactory and invites error. Thus, key size and the number of keys needed, determine the size of the board or keypad.

30

For the manufacturers of remote controllers, calculators, games, mobile phones and similar electronic communication equipment, the space required for adequate data

entry with conventional keys presents a continuing problem due to space limitations, and hinders desirable miniaturization of the device.

There exist many patents that address the alpha-numeric keypad problem.

5 However, none disclose a system for keypad/keyboard data entry that provides for error-free data without complexity, or allows for practical miniaturization of a keypad/keyboard while permitting any desired number of distinct, single key data entries in a simple "hands on" format.

10 In many of the prior art patents such as those of Hashimoto, U.S. Pat. No. 4,918,721 and Wen, U.S. Pat. No. 4,825,464, the alpha-numeric keypad data entry problem was solved, but the solution proved to be too elaborate and cumbersome for general use. However, the use of keypads with multi-directional keys is taught by a number of patents, and this is an approach that promises a possibility of keyboard miniaturization. Among these patents is a disclosure by Lin et al in U.S. Pat. No.  
15 5,528,235. Lin et al disclose a multi-status data entry key and a keyboard that is capable of a one-to-one correspondence between each key status and a pre-assigned signal or state. This is done by using a key having five facets and mounting it on a spring so that it can rock in four orthogonal directions and downwards. Thus each  
20 "key" acts as five keys; each facet direction push entering a different piece of data. No description or claim is given by Lin et al for the system required to convert and transmit this input data in usable form.

Unfortunately, the Lin et al invention and similar devices have not succeeded in the industrial market for telephonic communication or remote controllers and similar equipment. The reasons given by industry sources for failure to adopt these invention  
25 devices, include the likelihood of user finger tactile errors in data entry using multi-faceted keys such as described by Lin et al as well as an expensive complexity in manufacturing the device, particularly the keys. In view of the foregoing, it is clear that there remains a need for a simple, relatively error-free alpha-numeric data entry system for telecommunication equipment, as well as for space-constrained computers,  
30 miniaturized controllers and the like.

## SUMMARY OF THE INVENTION

5 The invention is a directionally-mapped, alpha-numeric data entry system comprising a key array, a micro-processor, a DTMF generator, an LCD driver and a display. The key array includes at least one set of "n" radial direction indicator keys and a numerical key group. Inscribed on the surface surrounding each numerical key in "n" radial directions are alpha notations, symbols or commands. Pressing any radial direction key and then a numerical key will enter the alpha notation or other symbol that is located around the numerical key and corresponds to the pressed radial direction. Thus, if eight radial directional keys are used, a total of eight different alpha entries plus one numeric can be entered for every key in the numerical key group without tactile problems or errors. A specially programed micro-processor accepts the keyed input signals and provides digital signals to a DTMF generator for conversion to DTMF codes for telecommunication.

10 The micro-processor also provides ASCII codes for computer input and signals to an LCD driver that drives the display. A complete system including the key array, uses only a few components which are readily available, is small in size, low cost and uses little power. It therefore would be readily adaptable and suitable for telecommunication equipment or other common data entry/communication devices.

15 Accordingly, it is a prime object of this invention to provide a system that enhances the functionality of a conventional numeric keypad while retaining simplicity in usage.

20 Another object is to provide an alpha-numeric data entry system that is economic to produce and practical to install.

25 Yet another object of this invention is to provide a data entry system that can be very small in size and lends itself to device miniaturization.

A prime advantage of this invention over prior art is that all the invention components are standard, available and low cost.

Further objects and advantages of the invention will be apparent from studying the following portion of the specification, the claims and the attached drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration of a conventional prior art keypad as is used for telephones;

FIG. 2 shows the word "BROWN" and the keypad strokes needed to enter each letter when using a conventional prior art keypad;

FIG. 3 shows an example of a multi-symbol data entry key array according to the present invention;

FIG. 4 is a simplified block diagram of the alpha-numeric data entry system according to the present invention;

FIG. 5 shows the word "BROWN" and the keypad strokes needed to enter each letter when using a data entry key array according to the present invention; and

FIG. 6 illustrates one of several alternative configurations for the directional keys that are located on a data entry key array according to the present invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring particularly to the drawings, there is shown in FIG. 1 an illustration of a conventional keypad 1 such as is used on telephones. Twenty-four letters of the alphabet, excluding "Q" and "Z" are shown in groupings of three on eight of the numerical keys. Refer now to FIG. 2 which shows a word "BROWN" to be keyed in. In order to do this, using the conventional keypad 1, a number of key strokes have to be entered for each letter, plus an extra key stroke when the word is completed. The key strokes corresponding to each letter of "BROWN" are shown under each letter. Thus to enter "B" 10, the "\*" key is pressed once to indicate alpha and the "2" key is pressed twice because "B" is the second letter on numerical key "2". Similarly, to enter "R" 15, the "\*" key must be pressed followed by pressing the "7" key twice. At the end of the word, after the key strokes "\*66" have been entered for the letter "N" 5, the "#" key 20 must be pressed to indicate the end of the alpha entry. There are sixteen separate key strokes that must be entered in proper sequence in order to enter the word "BROWN" on a conventional keypad, and there could be as many as twenty-one key strokes for some five letter words. Furthermore, there is no way of entering the letters "Q" or "Z".

It is then, not surprising that this formidable and error-prone way of entering alpha data into telephones is not at all favored by the public.

It is with hope of providing a public and industry favored way of alpha-numeric data entry, that the following preferred embodiment of a directionally-mapped alpha-numeric data entry system is offered.

Referring now to FIGS. 3 and 4, there is shown in FIG. 3 an example layout of a multi-symbol entry key array according to the present invention, and in FIG. 4, a simplified block diagram of the invention system. The system comprises: a pre-programmed micro-processor 60, a set of radial direction indicator (RDI) keys 45 and keypad or array keys 50 that provide data input signals to the micro-processor 60, a DTMF generator 65 which converts signals from the micro-processor into DTMF codes 70 for telephonic use, an LCD (liquid crystal display) driver 80 supplied by signals from the micro-processor 60 and a display 85 driven by the LCD driver 80.

The micro-processor 60 is programed to process all entered alpha-numeric data and to convert it to BCD code for transmission to a DTMF generator circuit, or to output ASCII codes 75 for computer use. In addition, provision is made for user selection of a verification mode of data entry whereby the user views the data entry on the display before agreeing to enter the data for processing.

Provision is also made for an alternative direction pointer 55 such as the well known computer mouse, to be connected and used instead of direction keys 45 on a keypad or array.

The micro-processor 60, DTMF generator 65 and LCD driver 80 are minute in size and use little input power. It is the key array that takes the most space.

The key array shown in FIG. 3 is an example of an array for combined controller/computer input. Radial direction indicator (RDI) keys are shown at the top of the array, on a large area membrane circuit surface 25. The eight directions are indicated by inscribed arrows 26, 27, 28, 29, 30, 31, 32 and 33, which are touched when required. The numerical keys 35 of which twelve are shown are, in this case, the same as conventional numerical keys.

Inscribed on areas 40 around each numerical key are eight different notations, each indicating a letter, number, a command or other symbol for entry. To enter any one data item other than the conventional keypad numerals, it is only necessary to first touch the RDI arrow on the membrane 25, corresponding to the position of the inscribed data 40 around a numeral key 35. Thus, to enter a "B" one would touch the UP arrow 27 and then press the "2" key. FIG. 5 illustrates the key strokes needed to enter the

word "BROWN". The key strokes 95, 96, 97, 98 and 99 are combinations of an RDI directional key stroke and a single numeric key stroke for a total of ten. The sequence of the 2-stroke process can be reversed if desired. This is called operating in a "reverse" or "confirm" mode. An advantage of operating in the "confirm" mode is to help an end-user to see the relative locations of possible key or function selections in the display after the first conventional key stroke. If followed by an RDI key, the associated mapping alpha/function will be confirmed and entered. If followed by a conventional key instead, the normal numerical data input will be accepted as regular numerical inputs.

For numerical data entries, the conventional single stroke process on the conventional keys remains unchanged.

In the array illustrated in FIG. 3, there are eight RDI direction keys and eight possible data entries inscribed around each of the twelve numerical keys. Therefore, in addition to the twelve numerical key single stroke entries, there are available  $8 \times 12 = 96$  additional data double stroke data entries, for a total of 108.

It should be noted that there could be any convenient number of keys in an array and any number of RDI direction keys.

The maximum number of data items inscribed around a given key depends primarily on the space provided around the key for printing the data items intelligibly. In the example array shown in FIG.3, there are eight data items. However, if two rings of data items were used, forming an inner and outer ring around a given key, there could be sixteen data items per key, plus the one single key item. An extra set of RDI direction keys for the outer data ring could be used for this configuration, or possibly a special "outer ring" key.

FIG.6 shows one possible arrangement of RDI direction keys as an alternative to that shown on FIG. 3. In this arrangement, the RDI direction keys are individually located and are not on a single membrane. Any arrangement of RDI direction keys is permissible, and this permits a location flexibility helpful in designing data entry key arrays for miniaturized control panels or keypads.

The selection of the number of keys, data entry type and number of entries, depends entirely on device application. For a standard telephone entry pad, the number of keys could remain as twelve numerical, with twenty-six alpha data items (A to Z) added. A practical number of RDI direction keys for this array is three, so that there

would be three letters or less around ten numerical keys. This ensures a simple error-free alpha-numeric input to a telephone. For dialing, number entry is done conventionally. For alpha-numeric or just alpha entry, only an unambiguous two stroke entry is required. It is not necessary to remember different codes or to figure out the number of strokes required, or whether an asterisk or pound sign input is required. This simple approach would be a great boon to telephone users and would probably be welcomed by the telecommunications industry as being long overdue.

A major characteristic of the invention system is that the ratio of input data to keys is increased to at least 9:1. As a result, the application of the invention system to space constrained communication devices, is facilitated by an ability to design for a much smaller number of keys than otherwise would be required. In particular, it is believed that the present invention system could be used to great advantage for space constrained devices such as remote controllers, electronic organizers, calculators, computers, games and various control panels.

There is also great flexibility in the type of keys that could be used. These keys could be any currently available types such as conductive, rubber or membrane circuitry.

Finally, it should be noted that the system electronic components are small in size, few in number, very low in power consumption and inexpensive in cost. For large manufacturing quantities, the entire system is very low cost.

From the foregoing description, it is believed that the preferred embodiment achieves the objects of the present invention. Various modifications and changes made be made in the system described above which are apparent to those skilled in the art. These alternatives and modifications are considered to be within the scope of the appended claims and are embraced thereby.

Having described the invention, what is claimed is:

1. An alpha-numeric data input/out system comprising:

(a) a key array, said array comprising a multiplicity of radial direction indicator (RDI) keys and a multiplicity of data entry keys;

5                   said RDI keys each being marked with an arrow showing its radial direction, said data entry keys each being marked for a selected data item, and including a multiplicity of alpha-numeric symbols inscribed at radial locations on the array surface immediately surrounding each key, defining auxiliary data items, with the number of said auxiliary data items per key being equal to or less than the number  
10                   of said RDI keys;

                  said RDI keys when any selected RDI key is depressed, acting together with any data entry key to enter the auxiliary data item which is associated with said data key and located in the corresponding radial direction marked on said selected RDI key;

15                   (b) a micro-processor connected to said key array, said micro-processor being programed to interpret all specific data items marked on said data entry keys and all said auxiliary data items marked on said key array, and to convert all said data items to BCD code for transmission to a DTMF generator circuit, said micro-processor also generating alpha-numeric signals corresponding to  
20                   data entries, for transmission to an LCD driver circuit;

                  (c) a DTMF generator circuit connected to said micro-processor for receiving BCD signals from said micro-processor and generating DTMF code tones for telephonic transmission;

25                   (d) a liquid crystal display (LCD) driver circuit connected to an output terminal of said micro-processor; and

                  (e) a liquid crystal display for displaying alpha-numeric data entries as they are made.

2. The system according to claim 1 wherein:

                  said micro-processor is programed to generate ASCII code signals corresponding to data entries, for transmission to an ASCII code signal input device.

3. The system according to claim 1 wherein:

said micro-processor is programed to accept entry of  
said auxiliary items in a confirm mode of operation,  
said confirm mode, permitting display of all auxiliary data items

5 surrounding a selected data entry key, for user review and selection before any  
selected auxiliary data item is entered and processed.

4. The key array according to claim 1 wherein:

said key array includes provision for connection of an alternative radial  
direction indicator device that disables

said RDI keys and performs the same function as said RDI keys.

5. The key array according to claim 1 wherein:

said RDI keys may all be included on a single membrane circuit surface  
or be separate keys, arranged in any location on the surface of said key array.

6. An alpha-numeric data input/out system for telephones,

comprising:

(a) a key array, said array comprising three radial direction indicator  
(RDI) keys and twelve data entry keys;

5 said RDI keys each being marked with an arrow showing its  
radial direction, said RDI keys being located on a large area membrane  
circuit element;

10 said data entry keys, each being marked for a direct numeric  
("1" thru "9" and "0") or symbolic data entry, and ten of said data entry  
keys having three or less alpha symbols inscribed at radial locations on  
the array surface immediately surrounding each key, defining twenty-  
six alpha data items ( "A" thru "Z" );

15 said RDI keys when any selected RDI key is depressed, acting  
together with any data entry key to enter the alpha data item which is  
associated with said data entry key and located in the corresponding  
radial direction marked on said selected RDI key;

20 (b) a micro-processor connected to said key array, said micro-processor being programed to interpret all entered alpha-numeric items marked on said key array, and to convert all said data items to BCD code for transmission to a DTMF generator circuit, said micro-processor also generating alpha-numeric signals corresponding to data entries, for transmission to an LCD driver circuit;

25 (c) a DTMF generator circuit connected to said micro-processor for receiving BCD signals from said micro-processor and generating DTMF code tones for telephonic transmission;

(d) a liquid crystal display (LCD) driver circuit connected to an output terminal of said micro-processor; and

(e) a liquid crystal display for displaying alpha-numeric data entries as they are made.


7. The key array according to claim 6 wherein:

said RDI keys are separately mounted and connected keys and are arranged, spaced apart, in any suitable location on the surface of said key array.


8. The system according to claim 6 wherein:

5 said micro-processor is programed to accept entry of said alpha data items in a confirm mode of operation, said confirm mode, permitting display of all alpha data items surrounding a selected data entry key, for user review and selection before any said alpha data item is entered and processed.

1/4

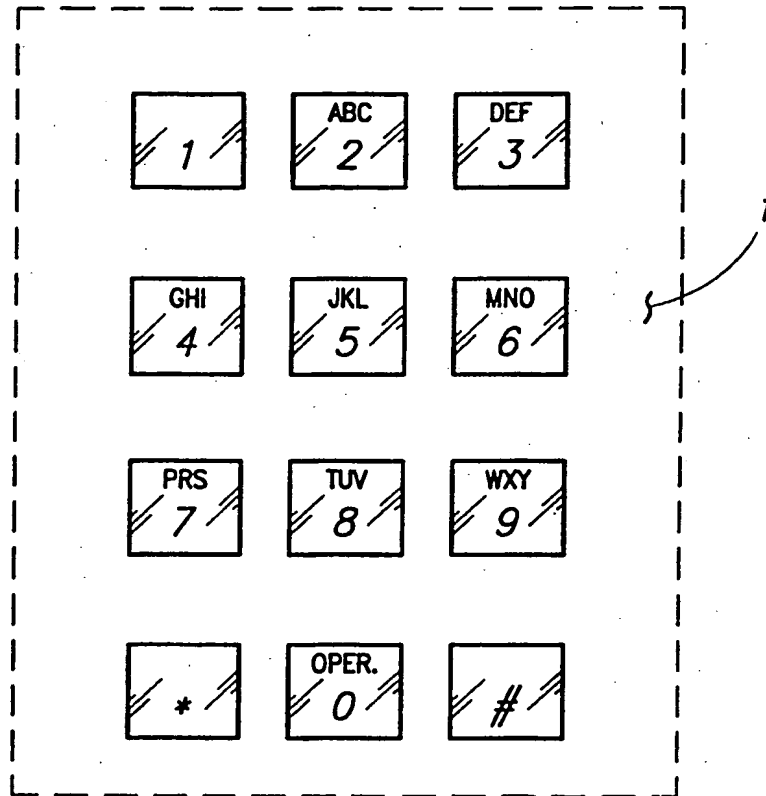

*Fig 1 Prior Art*

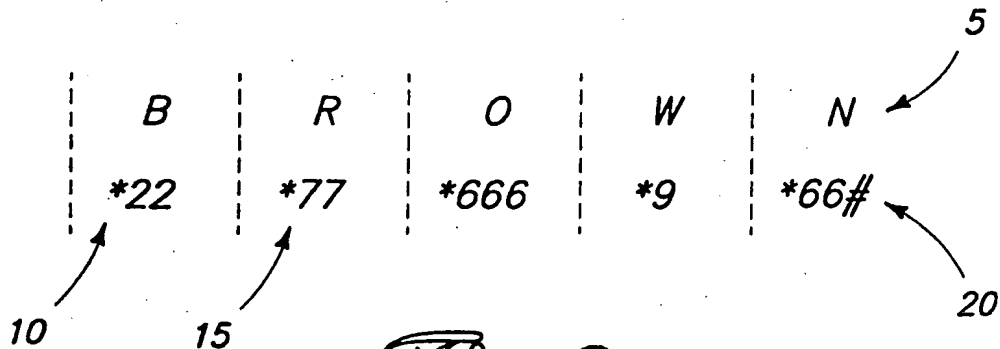

*Fig 2*

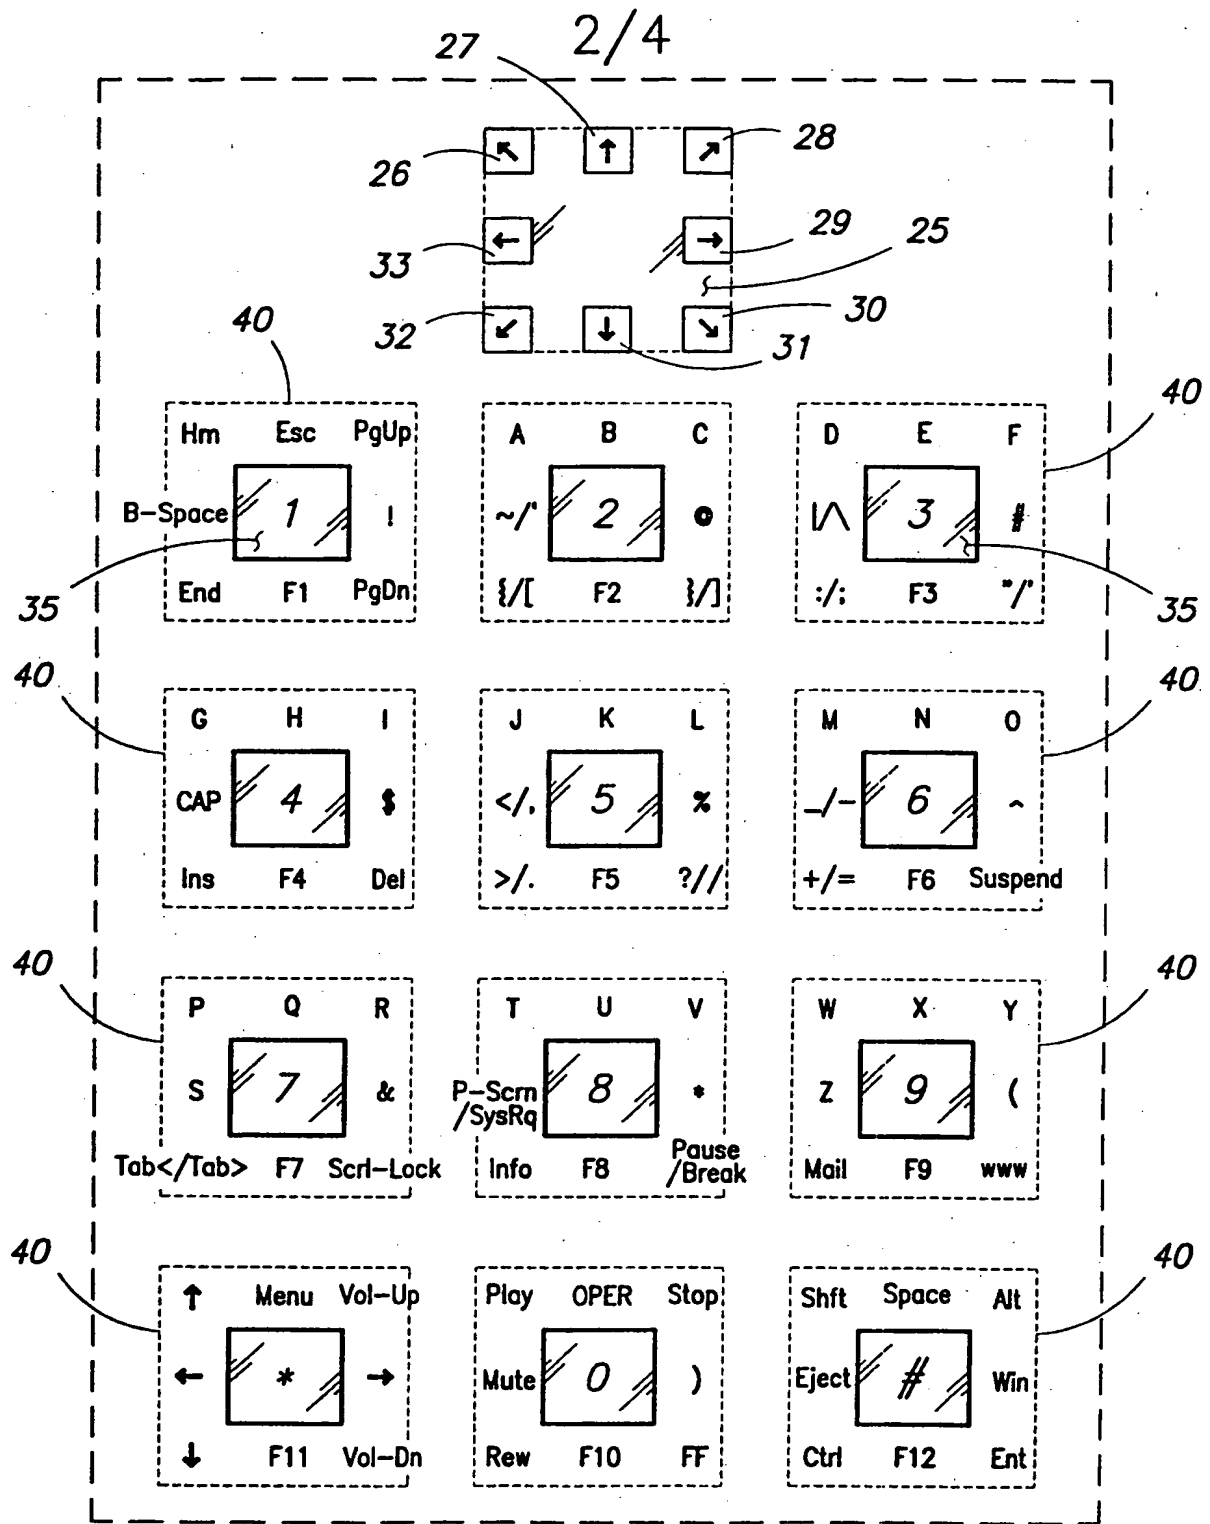


Fig 3

3/4



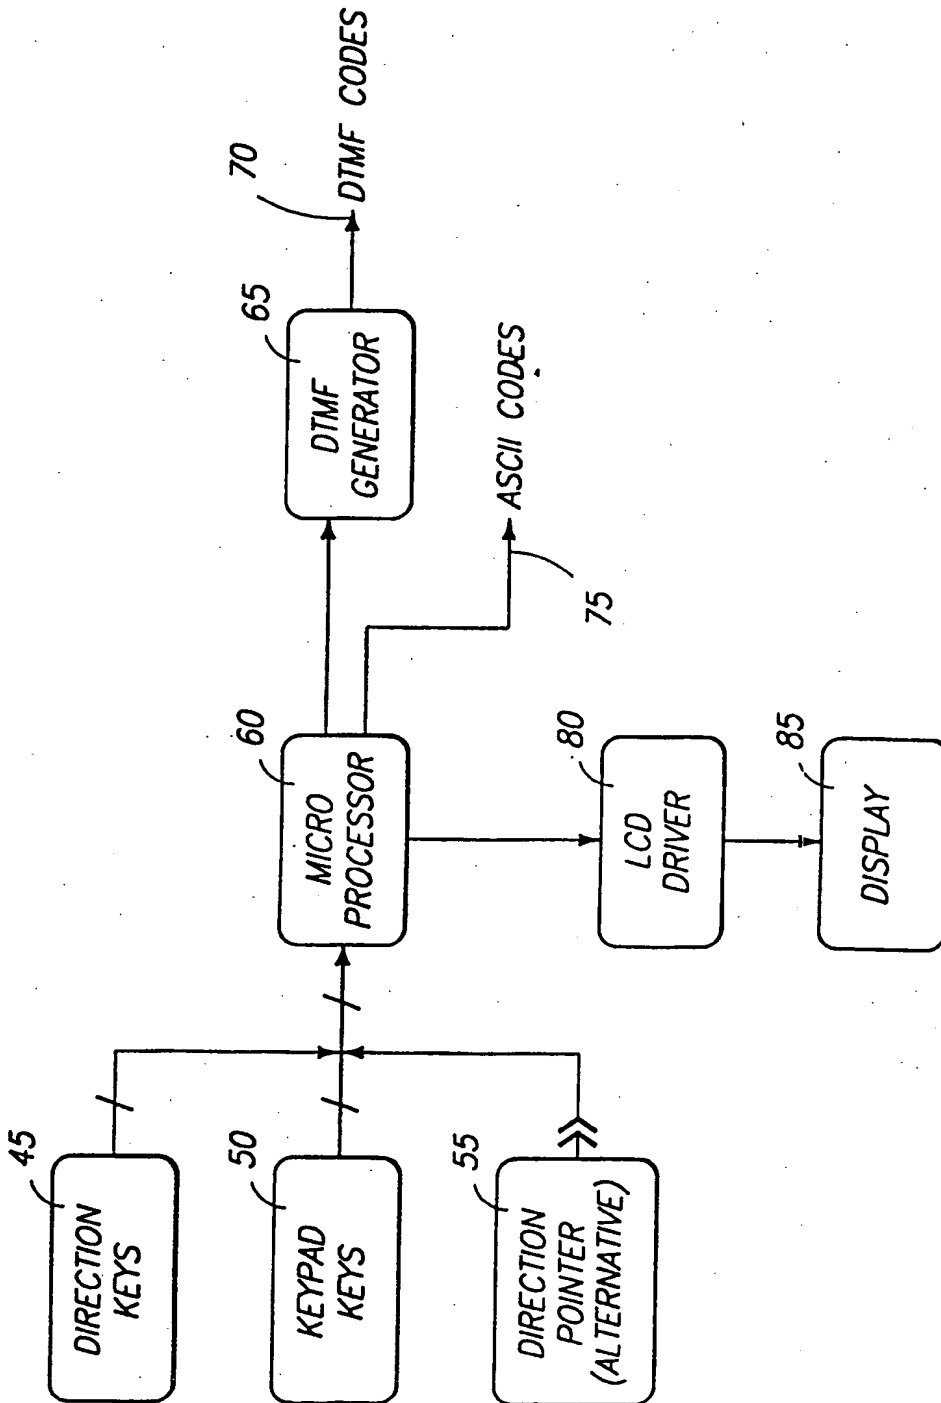


Fig 4

4/4

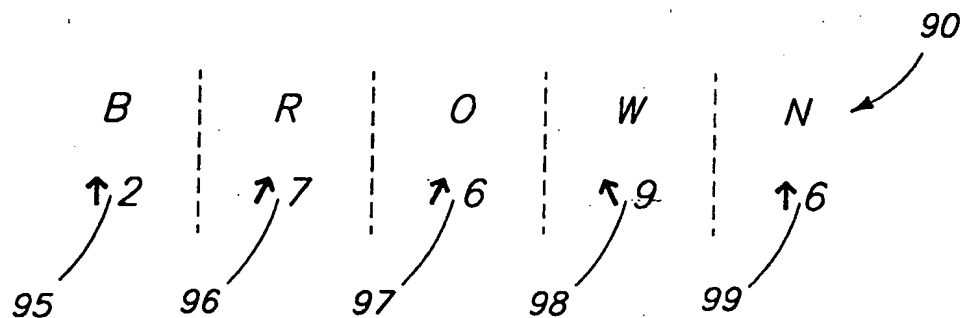

*Fig 5*

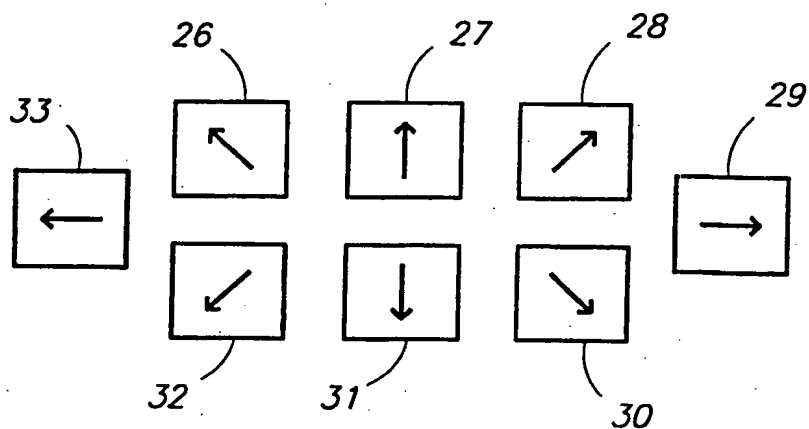

*Fig 6*

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/30129

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F3/023 H04M11/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 790 103 A (WILLNER MICHAEL A) 4 August 1998 (1998-08-04) column 3, line 54 - column 5, line 40 column 6, line 24 - line 66 column 7, line 13 - line 17 column 8, line 14 - line 56	1,2,5-7
Y	-----	3,8
Y	EP 0 397 164 A (ALCATEL BUSINESS SYSTEMS) 14 November 1990 (1990-11-14) column 3, line 16 - column 4, line 30	3,8
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 13, 30 November 1998 (1998-11-30) & JP 10 210129 A (KOKUSAI ELECTRIC CO LTD), 7 August 1998 (1998-08-07) abstract	1,6
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

18 April 2000

Date of mailing of the international search report

27/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bailas, A

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/30129

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 242 047 A (PITNEY BOWES) 18 September 1991 (1991-09-18) page 3, paragraph SECOND page 6, line SECOND -page 7	1,5-7
A	DE 34 46 147 A (SIEMENS AG) 19 June 1986 (1986-06-19) the whole document	1,5,6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/30129

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5790103	A	04-08-1998	NONE	
EP 0397164	A	14-11-1990	FR 2646808 A AT 98565 T DE 69005186 D DE 69005186 T DK 397164 T ES 2047192 T	16-11-1990 15-01-1994 27-01-1994 31-03-1994 21-03-1994 16-02-1994
JP 10210129	A	07-08-1998	NONE	
GB 2242047	A	18-09-1991	CA 2038065 A	13-09-1991
DE 3446147	A	19-06-1986	NONE	